




Pneumatic Actuator - Spring Return

No. JT/JN-S

- SINGLE ACTING
- MATERIAL: HIGH-QUALITY ALUMINUM ALLOY CYLINDER BLOCK
- CONNECTION FLANGE (BOTTOM) ACC. TO ISO 5211/ DIN3337(F03-F25)
- TOP MOUNTING ACC. TO VDI/ VDE3845 & NAMUR
- MEDIA: DRY OR LUBRICATED AIR, OR INERTIA GASES
- AIR PRESSURE: 3-8 BAR

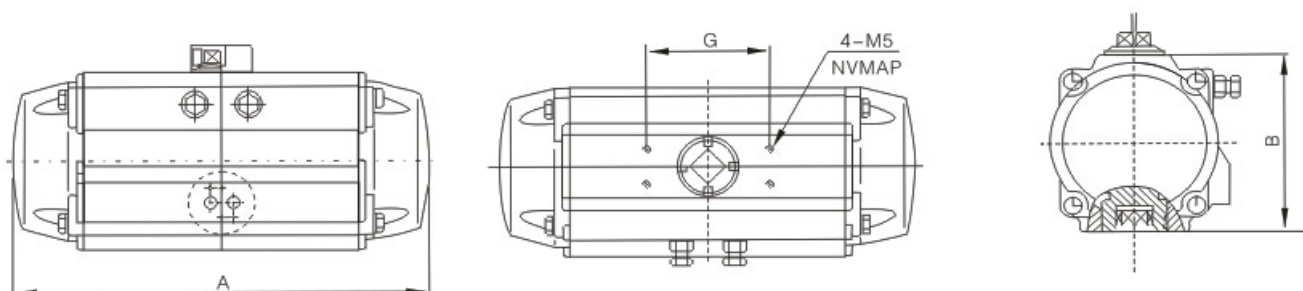

Dimensions of Single acting pneumatic actuator

Item	Diameter	4.5 bar	5 bar	6 bar	A	B	G	Top flange ISO 5211	Max sha
Model									
JN050S	50	Please contact with JAKI about torque for different pressure different spring quantity.			155	69	80	F05/F03	11
JN063S	63				167	87	80	F05/F03	14
JN075S	75				184	100	80	F07/F05	14
JN090S	90				262	117	80	F07/F05	17
JN100S	100				268	133.5	80	F10/F07	22
JN115S	115				316	145	80	F07/F10	22/2
JN125S	125				298	155	130	F10/F07	22

JN145S	145		417	176	130	F12/F10	27
JN160S	160		458	198	130	F12/F10	27
JN190S	190		535	230	130	F14	36
JN210S	210		584	255	130	F14	36
JN240S	240		660	291	130	F16	46/5
JN270S	270		730	332	130	F16	46/5
JN300S	300		794	354	130	F16	46.3
JN350S	350		880	410	130	F16	46.3
JN400S	400		998	466	130	F25	55

Sản phẩm khác



—

[Pneumatic Actuator - Double Acting](#)

[Xem thêm Pneumatic Actuator - Double Acting](#)



—

[Quarter Turn Electric Actuator](#)

[Xem thêm Quarter Turn Electric Actuator](#)



—

[Spring Return Electric Actuator](#)

[Xem thêm Spring Return Electric Actuator](#)



—

[Linear Electric Actuator](#)

[Xem thêm Linear Electric Actuator](#)



—

[Air Filter Regulator](#)

[Xem thêm Air Filter Regulator](#)



—

[Clutch manual gear](#)

[Xem thêm Clutch manual gear](#)