



**Van điện từ hơi 2L400-25J- Round-Star**

**2L-series 2-way piston(NC) steam solenoid valve 3/8"□□2"**



2L-15J

2L-25

working medium □ steam, oil (viscosity ≤ 20cst)

medium temperature □ -5 □ 180°C

working pressure □ 0.5 □ 16bar

working type □ pilot operated, NC

valvebody material □ brass SS304

sealing material □ PTFE

interface □ G thread NPT thread


working voltage □ AC220 □ 240V AC110V 50/60Hz 50VA

DC24V/12V 30W IP54 H degree

options □ Rc thread

**order code**

<b>2L</b>	<b>Thread Code</b>	<b>J</b>	<b>T</b>	<b>Voltage</b>
Model	10: 3/8" 15: 1/2" 20: 3/4" 25: 1" 35: 1 1/4" 40: 1 1/2" 50: 2"	Blank: brass J: SS304	Blank: G thread T: NPT thread	AC220V AC110V DC24V DC12V

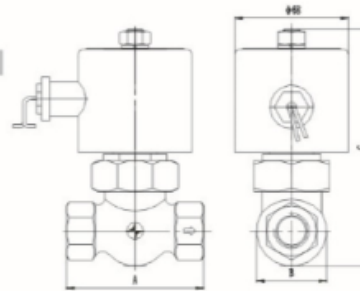

**2L-series solenoid valve specification table**

**2L-series solenoid valve drawing**

Model	Orifice size (mm)	Interface size	Cv	Working pressure(bar)		Dimension L × W × H A × B × C	Normal order code Voltage AC220V G thread	Weight(Kg)	
				AC 220V	DC 24V			Brass	SS304
2L-10	17	3/8"	4.8	0.5-16	0.5-16	82 × 42 × 146	2L-10-AC220V	1.5	1.4
2L-15	17	1/2"	4.8	0.5-16	0.5-16	82 × 42 × 146	2L-15-AC220V	1.5	1.4
2L-20	17	3/4"	4.8	0.5-16	0.5-16	82 × 42 × 146	2L-20-AC220V	1.8	1.8
2L-25	20	1"	11	0.5-16	0.5-16	90 × 54 × 162	2L-25-AC220V	2.6	2.5
2L-35	30	1 1/4"	25	0.5-16	0.5-16	110 × 75 × 185	2L-35-AC220V	2.9	2.5
2L-40	30	1 1/2"	25	0.5-16	0.5-16	110 × 75 × 185	2L-40-AC220V	3.4	2.9
2L-50	38	2"	48	0.5-12	0.5-12	120 × 77 × 195	2L-50-AC220V	3.8	



2L-15J

2L-25

## Sản phẩm khác



—

[Vạn điện từ đồng](#)

[Xem thêm Vạn điện từ đồng](#)



—

## [Van điện từ 09](#)

[Xem thêm Van điện từ 09](#)



—

## [Flange solenoid valve](#)

[Xem thêm Flange solenoid valve](#)



—

## [Van điện từ hơi 180](#)

[Xem thêm Van điện từ hơi 180](#)



—

## [Van điện từ thường mở](#)

[Xem thêm Van điện từ thường mở](#)



—

[Van điện từ inox 304](#)

[Xem thêm Van điện từ inox 304](#)