



MẶT BÍCH RỘNG THÉP SS400 DIN 2576 PN10

MÃ SẢN PHẨM
TÊN SẢN PHẨM

SP - 41
MẶT BÍCH RỘNG THÉP ĐÚC SS400 DIN 2576
PN10

Loại Bích

Bích rộng mặt phẳng/Slip-On (FF), Nâng cao mặt
(RF)

Chất Liệu

Thép đúc áp lực - Forged Carbon Steel SS 400 - SF
440A

Tiêu Chuẩn

DIN 2576 - EN 1092 - 1 - BS 4504

Áp Lực

PN 6 ~ PN 10 ~ PN 16 ~ PN 25 ~ PN 40 ~ PN 64

Kích Cỡ

DN 15A → DN 500A ~ (1/2" inch → 20 inch) ~ (21.3
mm → 508 mm)

Sử Dụng

Nước, nước thải, hơi nóng, khí nén, gas, xăng, dầu,
nhiệt điện,...


Sản Phẩm

Phủ sơn chống gỉ, vàng trong, sơn đen, mạ kẽm &
nhúng nóng

Tình Trạng
Xuất Xứ

Hàng có sẵn, mới 100%
Trung Quốc, Đài Loan, Việt Nam

DIN2576 PN10 Plate Flange

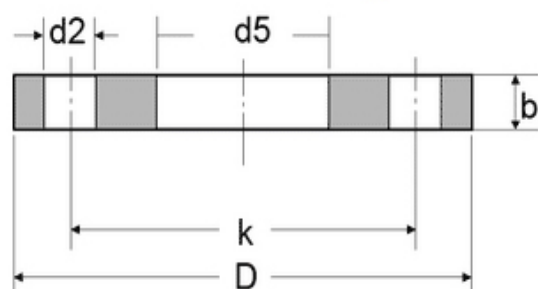

DIN 2576 PN10 Plate flange Manufacturer among supplies slip on flange according to din2576, slip-on-welding plate flange, which pressure grade is 10bar/PN10, Size from DN10 to DN1000, in forged steel, Stainless Steel, Carbon steel etc..

Dimension and Weight of DIN 2576 PN10 Plate flange

Nominal Pipe Size	Diameter of Pipe		Flange Dimension			Nuts & Bolts			Approx. Flange Weight
			Flange I.D	Flange Dia	Thk of Flange	Dia of Bolt Circle	No. of Holes	Dia of Bolt Holes	
DN	ISO	DIN	d5	D	b	k		d2	KG /PCS
10	-	14	14.5	90	14	60	4	14	0.61
	17.2	-	17.7	90	14	60	4	14	0.6
15	-	20	21	95	14	65	4	14	0.67
	21.3	-	22	95	14	65	4	14	0.67
20	-	25	26	105	16	75	4	14	0.94
	26.9	-	27.6	105	16	75	4	14	0.94
25	-	30	31	115	16	85	4	14	1.13
	33.7	-	34.4	115	16	85	4	14	1.11
32	-	38	39	140	16	100	4	18	1.66
	42.4	-	43.1	140	16	100	4	18	1.62
40	-	44.5	45.5	150	16	110	4	18	1.89
	48.3	-	49	150	16	110	4	18	1.85
50	-	57	58.1	165	18	125	4	18	2.5
	60.3	-	61.1	165	18	125	4	18	2.46
65	76.1	-	77.1	185	18	145	4	18	2.99
80	88.9	-	90.3	200	20	160	8	18	3.61
	-	108	109.6	220	20	180	8	18	4.17
100	114.3	-	115.9	220	20	180	8	18	3.99
	-	133	134.8	250	22	210	8	18	5.66
125	139.7	-	141.6	250	22	210	8	18	5.41
	-	159	161.1	285	22	240	8	22	6.97
150	168.3	-	170.5	285	22	240	8	22	6.55
	193.7	-	196.1	315	24	270	8	22	8.42
200	219.1	-	221.8	340	24	295	8	22	9.28
	-	267	270.2	395	26	350	12	22	12.36
250	273	-	276.2	395	26	350	12	22	11.85
	323.9	-	327.6	445	26	400	12	22	13.61
350	355.6	-	359.7	505	28	460	16	22	20.35
	-	368	372.2	505	28	460	16	22	18.77
400	406.4	-	411	565	32	515	18	26	27.52
	-	419	423.7	565	32	515	18	26	35.43
450	457	-	462.3	615	38	565	20	26	35.11
500	508	-	613.6	670	38	620	20	26	40.2
600	610	-	615.5	780	40	725	20	26	51.87

DIN 2576 slip-on-welding plate flange is made by Deutsches Institut für Normung (DIN), the German Institute for Standardization, are the national bodies responsible for establishing and administering standards for industry and business in their respective countries. DIN 2576 is slip on flange from DN10 to DN1000, pressure grade PN10, 10bar. It is similar to Chinese GB standard and BS British standard. Recently EN standard will instead of DIN standard.

Sản phẩm khác



—

[RẮC CO REN THÉP RÈN A105](#)

[Xem thêm RẮC CO REN THÉP RÈN A105](#)



—

[CÀ RÁ REN ÁP LỰC INOX 304L](#)

[Xem thêm CÀ RÁ REN ÁP LỰC INOX 304L](#)



[MẶT BÍCH RỘNG INOX 304](#)

[Xem thêm MẶT BÍCH RỘNG INOX 304](#)



[MẶT BÍCH INOX 304](#)

[Xem thêm MẶT BÍCH INOX 304](#)



—

[MẶT BÍCH MÙ THÉP SS400 DIN 2527 PN40](#)

[Xem thêm MẶT BÍCH MÙ THÉP SS400 DIN 2527 PN40](#)



—

[MẶT BÍCH CỔ INOX 304 ANSI CLASS 150 LBS](#)

[Xem thêm MẶT BÍCH CỔ INOX 304 ANSI CLASS 150 LBS](#)