


Van điện từ hơi 2L400-40J- Round-Star

2L -series 2-way piston(NC) steam solenoid valve 3/8□□2□

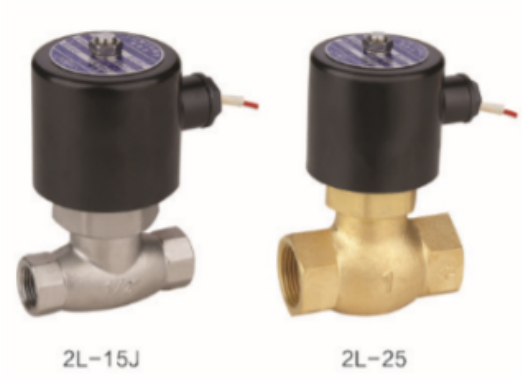

working medium□steam, oil(viscosity≤20cst□

medium temperature□-5 □ 180℃

working pressure□0.5 □ 16bar

working type□pilot operated, NC

valvebody material□brass SS304

sealing material□PTFE


interface□G thread NPT thread


working voltage□AC220□240V AC110V 50/60Hz 50VA

DC24V/12V 30W IP54 H degree

options□Rc thread

order code

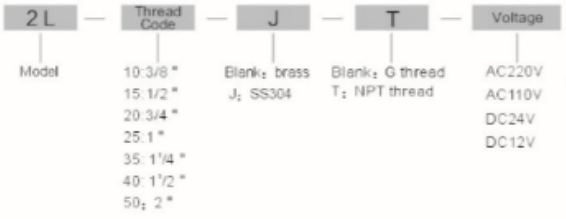

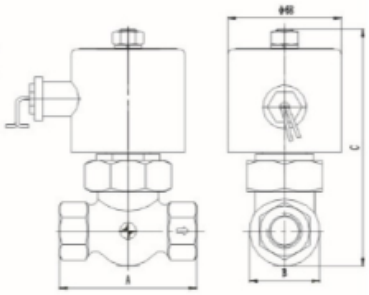

2L-series solenoid valve specification table

2L-series solenoid valve drawing

Model	Orifice size (mm)	Interface size	Cv	Working pressure(bar)		Dimension	Normal order code	Weight(Kg)	
				AC 220V	DC 24V	L×W×H A×B×C	Voltage AC220V G thread	Brass	SS304
2L-10	17	3/8 "	4.8	0.5~16	0.5~16	82×42×146	2L-10-AC220V	1.5	1.4
2L-15	17	1/2 "	4.8	0.5~16	0.5~16	82×42×146	2L-15-AC220V	1.5	1.4
2L-20	17	3/4 "	4.8	0.5~16	0.5~16	82×42×146	2L-20-AC220V	1.8	1.8
2L-25	20	1 "	11	0.5~16	0.5~16	90×54×162	2L-25-AC220V	2.6	2.5
2L-35	30	1¼ "	25	0.5~16	0.5~16	110×75×185	2L-35-AC220V	2.9	2.5
2L-40	30	1½ "	25	0.5~16	0.5~16	110×75×185	2L-40-AC220V	3.4	2.9
2L-50	38	2 "	48	0.5~12	0.5~12	120×77×195	2L-50-AC220V	3.8	



Sản phẩm khác

Van điện từ đồng

Xem thêm Van điện từ đồng

Van điện từ 09

Xem thêm Van điện từ 09

Flange solenoid valve

Xem thêm Flange solenoid valve



Van điện từ hơi 180

Xem thêm Van điện từ hơi 180



Van điện từ thường mở

Xem thêm Van điện từ thường mở

Van điện từ inox 304

Xem thêm Van điện từ inox 304